

WARINING

1. After 300-500 pumps or when you feel it becomes hard to pump, please add one drop oil to maintain the tube.
2. To avoid burning, add only ONE drop oil every time.
3. Please pump completely, pull to the top and press to the rock bottom, when you use the handpump.

Contact information:

Huben Hong Kong Co., Limited

Email: huben@hubenairguns.com
Website: www.hubenairguns.com
Skype: hubenairgun
Facebook: Huben Jacky
WeChat: Huben - Jacky

Handpump


HB35









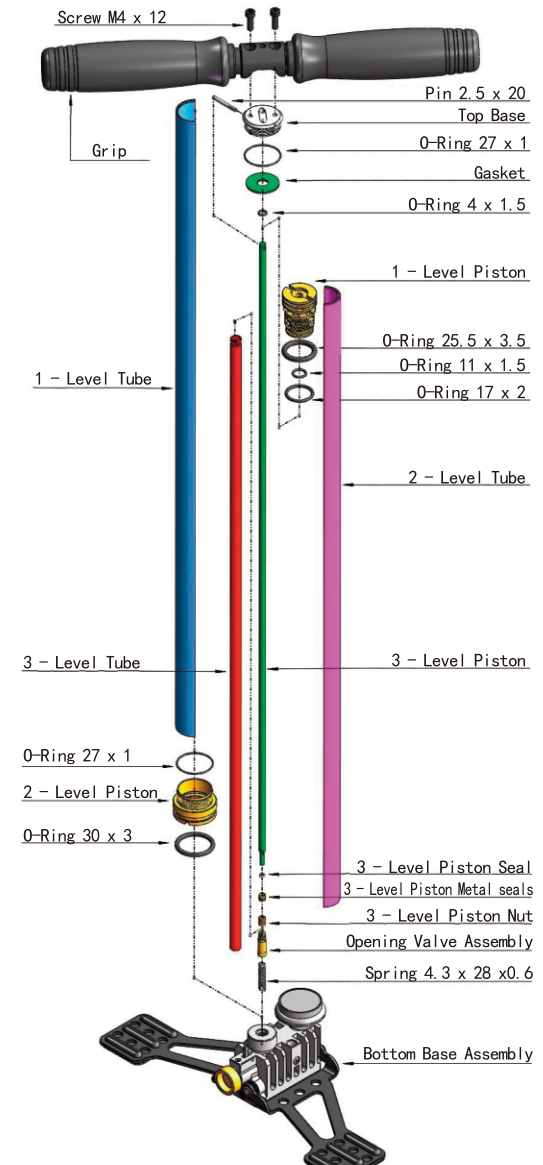







HUBEN

















EXPLODED DRAWING







List of parts

NO.	Part Name	Drawing	Quality
1	Grip		1
2	M4 x 12 Screw		2
3	Top Base Assembly		1
4	Pin 2.5 x 20		1
5	O-Ring 4 x 1.5		1
6	3-Level Piston Assembly		1
7	3-Level Tube		1
8	Opening Valve Assembly & Spring		1
9	2-Level Tube		1
10	2-Level Piston Assembly		1
11	1-Level Tube		1
12	1-Level Piston Assembly		1
13	Bottom Base Assembly		1
14	Bleed Hose		1

List of Attachment

NO.	Part Name	Drawing	Quality
1	Fill Probe		1
2	O-ring 5x1.5 (Fill Probe)		3
3	Seal of Fill Probe		1
4	Tool		1
5	Oil (Car Engine oil)		1
6	O-ring 25.5 x 3.5		2
7	O-ring 30 x 3		2
8	O-ring 27 x 1		2
9	O-ring 4 x 1.5		2
10	O-ring 4 x 0.5		1
11	O-ring 17 x 2		1
12	O-ring 11 x 1.5		2
13	O-ring 7 x 1.5		2
14	O-ring 21 x 2		2

List of Attachment

NO.	Part Name	Drawing	Quality
15	3-Level Piston Seal		1
16	O-ring 5 x 1		1
17	O-ring 8 x 1		1
18	O-ring 6 x 1		1


Note: All the drawings in the two tables are for reference only, and the actual parts kind prevail!

Specification

1. Length: OFF 620mm, ON 1103mm;
2. Weight: 1.28KG;
3. Working pressure: 35MPa or 350BAR or 5075psi;
4. Foldable foot plate;
5. Foldable grip;
6. Output nut: M10X1

Operating Instruction

1. Fold and Unfold the Grip




2. Fold and Unfold the Foot Plate



3. Unlock the Tube: turn the knob in clockwise direction



4. Leak the Air in Bleed Hose: turn the knob in anti-clockwise direction



5. Lock the Tube: pump to the bottom, it will lock automatically



6. Add oil: drop the oil into the hole on the top of grip

(any Magnatec Engine oil is acceptable)

